
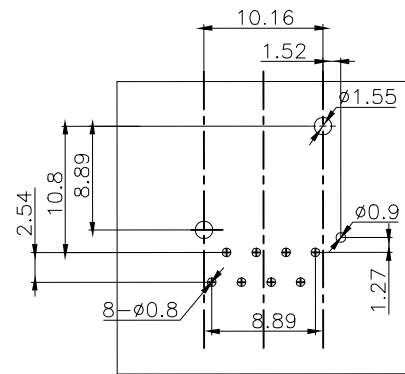
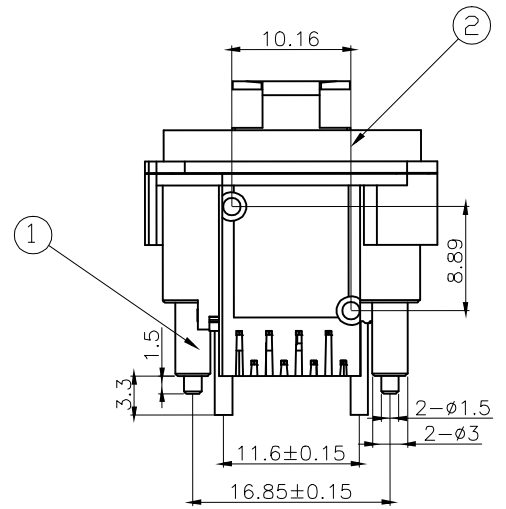
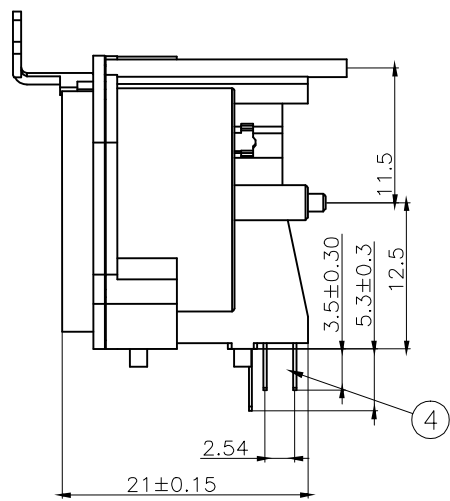



REACH & RoHS
COMPLIANT

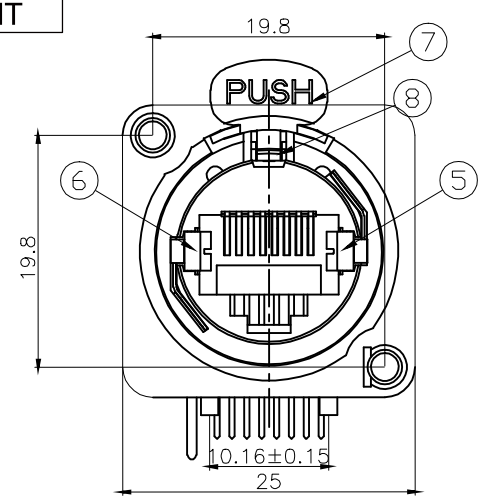

PCB LAYOUT
RECOMMENDED

General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance:≤30mΩ
Insulation Resistance:≥500MΩ
Dielectric Strength:500V AC/(50HZ)/Min
Mating And unmating Force:3~20N
Durability:750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper
Please refer to the customer drawing when customer has specified

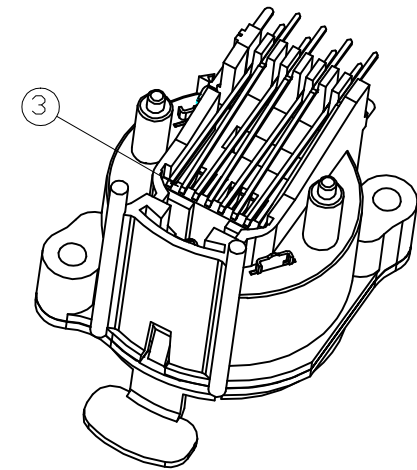


7	Press handle	stainless steel	1	NI	
6	Shrapnel	manganese steel	1	NI	
5	Internal shrapnel	H62	1	NI	
4	back covert	LCP	1	BLACK	
3	panel	PA66	1	BLACK	
2	PIN INSERTION	PHOSPHOR BRONZE	8	1U"	
1	PLASTIC BASE	PA66	1	BLACK	
SERIAL NUMBER	NAME	MATERIALS	QUANTITY	COATING/ COLOUR	NOTES

 **苏州沃虎电子科技有限公司**
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE: Square with lock 90°	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
			x±0.35	x°±3.0°	
PART NO.: WH80000051AB35	SACLE 1:1	REV A0	.x±0.30	.x°±2.0°	CHECKED BY: Elvis.Song
			.xx±0.25	.xx°±1.5°	
REMARK:	SHEET 1/1		.xxx±0.10	.xxx°±1.0°	DESIGND BY: Sunny.Xu