
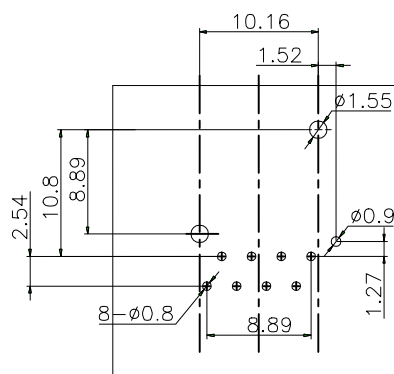
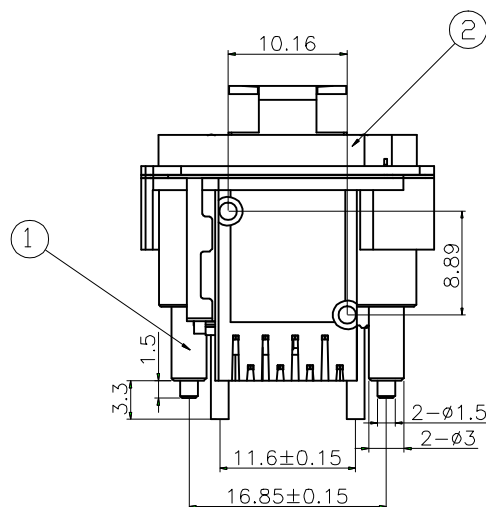
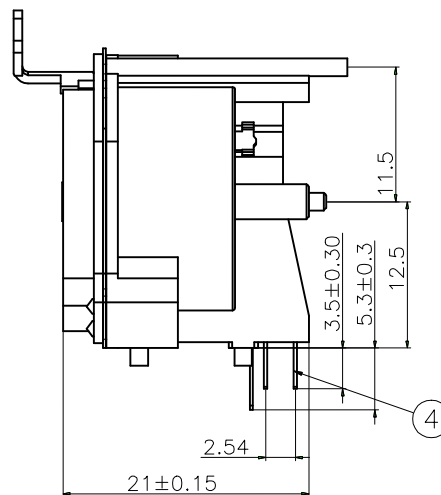



REACH & RoHS
COMPLIANT

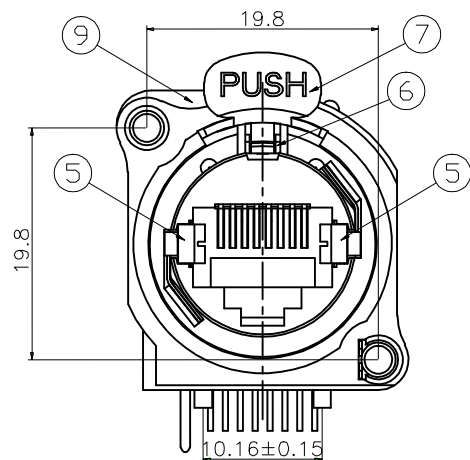

PCB LAYOUT
RECOMMENDED

General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance:≤30mΩ
Insulation Resistance:≥500MΩ
Dielectric Strength:500V AC/(50HZ)/Min
Mating And Unmating Force:3~20N
Durability:750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper
Please refer to the customer drawing when customer has specified

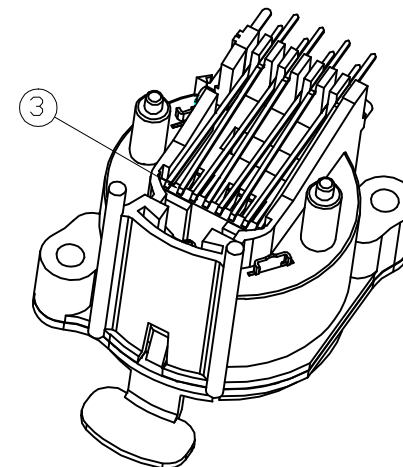

9	shield	H62	1	NI	
8	Right shrapnel	H62	1	MI	
7	Left shrapnel	H62	1	MI	
6	Press handle	stainless steel	1	NI	
5	shrapnel	manganese steel	1	NI	
4	back covert	LCP	1	BLACK	
3	panel	kirsite	1	BLACK	
2	PIN INSERTION	PHOSPHOR BRONZE	8	1U"	
1	PLASTIC BASE	PA66	1	BLACK	
SERIAL NUMBER	NAME	MATERIALS	QUANTITY	COATING/ COLOUR	NOTES

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
Awith lock 90° Metal panel

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHA9080001051AB35

SACLE
1:1

REV
A0

$x \pm 0.35$
 $.x \pm 0.30$
 $.xx \pm 0.25$
 $.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$
 $.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

CHECKED BY:
Elvis.Song
DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1

