

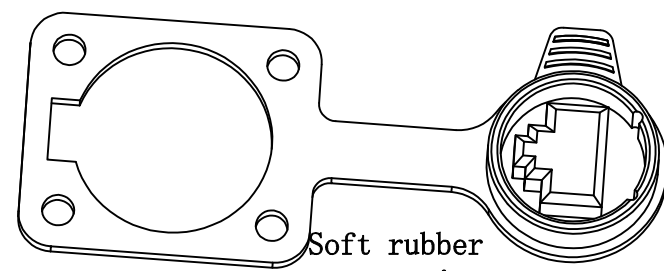
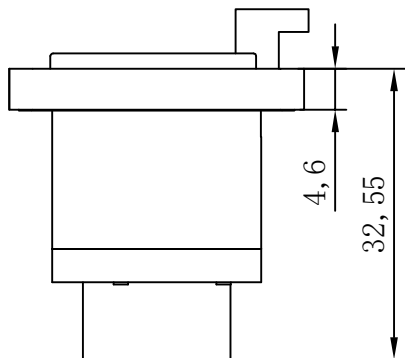




REACH & RoHS
COMPLIANT

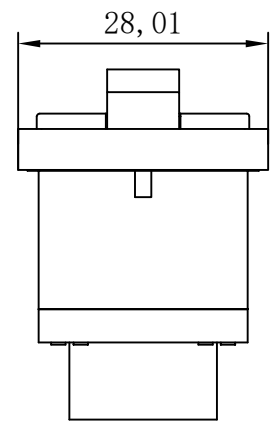

Soft rubber
accessories

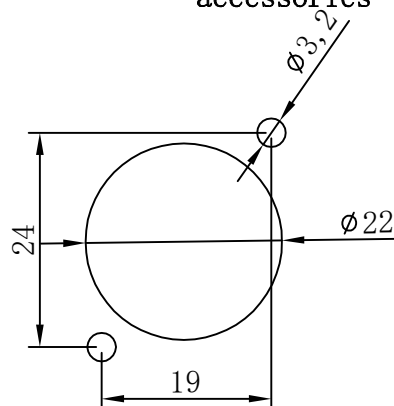

Frontplattenausschnitt (Rueckseite)
Panel cut out (rear side)

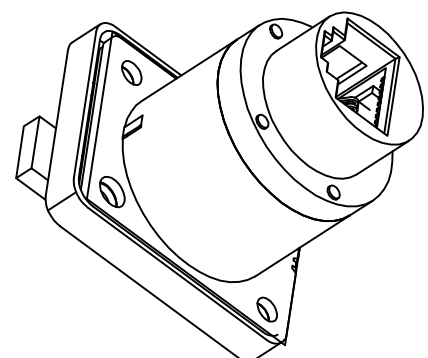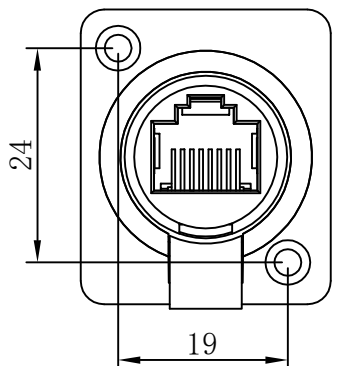

Electrical
Contact Resistance: <10mΩ
Insulation strength: 1 kvdc
Frequency range: 1-100 MHz
Insulation resistance: >0.5 GΩ
Single contact rated current: 1.5A
rated voltage: <50 V
Transmission performance: Class D
Meet the criteria: TIA/EIA 586B IEC11801

Mechanical
Insertion force: ≤ 20 N
Pull out the force: ≤ 20 N
Service life: > 1000 pluggings
Panel thickness: Max. 3mm 0.12
Wiring: vertical PCB installation
Locking device: Latch Lock
Installation direction: rear installation
Base Shape: A
Mounting: A-Screw

Material
Plating of contacts: 0.2 um Au over Ni plating
Contact: bronze (Cusn8)
Inner core: PBTP 15% GR
The shell: PBTP 15% GR

Environmental
Flammability: UL 94 V-0
Solderability: comply with IEC 68-2-20
Operating temperature: -30℃ to 80℃

9	直通内芯	PHOSPHOR BRONZE (0.3*64)	1	LCP/未镀	
8	按柄弹片	锰钢	1	NI	
7	按柄	不锈钢	1	NI	
6	软胶防尘盖	硅胶 (50%)	1	/	
5	软胶内垫	硅胶 (50%)	1	BLACK	
4	排 针	PHOSPHOR BRONZE	8	1U"	
3	180° 后盖	PA66	1	BLACK	
2	金属面板	锌合金	1	NI	
1	主体基座	PA66	1	BLACK	
序号	名 称	材 料	数 量	镀层/颜色	备 注

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
KNZ-63 180°
PART NO.:
WHKNZ63180

SIZE
A4
UNITS
MM[INCH]
SACLE
1:1
REV
A0

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

CHECKED BY:
Elvis.Song
DESIGND BY:
Sunny.Xu