

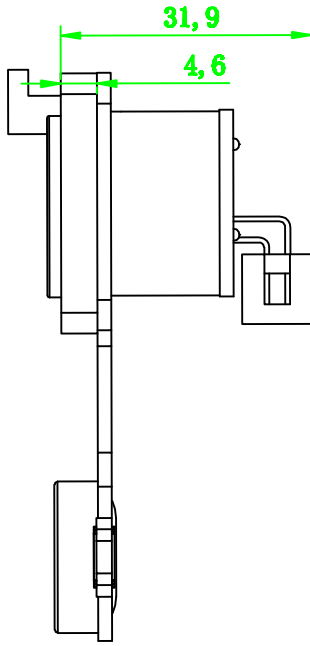
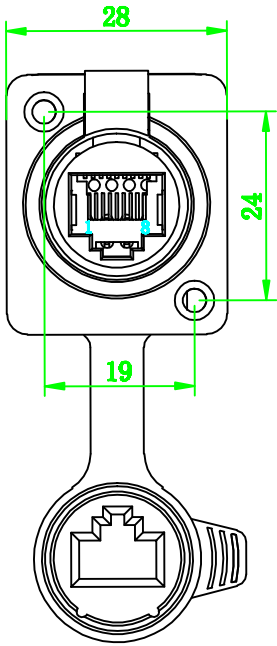
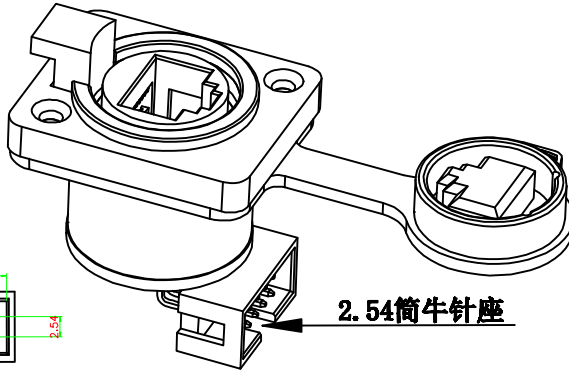


REACH & RoHS
COMPLIANT




网口RJ45	接线表	排针
1		1
2		2
3		3
4		4
5		5
6		6
7		7
8		8

技术要求 Specifications:
1. 额定电流 Rated current: 1.5A
2. 额定电压 Rated voltage: 125VAC
3. 耐压 Dielectric withstanding voltage: 1000VAC
4. 绝缘阻抗 Insulation resistance (Min): 500M
5. 接触阻抗 Contact resistance (Max): 30 m
6. 适用线规 Wire gauge: / AWG
7. 线径直径 Cable OD: /
8. 防护等级 IP code: 连接状态 ☐ IP44 ☒ IP65 ☐ IP67 ☐ IP68
9. 机械寿命 Operating cycles (Min): 500次
10. 紧固扭矩 Tightening torque : 0.4N.m
11. 工作温度 Operating temperature: -25°C ~ +85°C

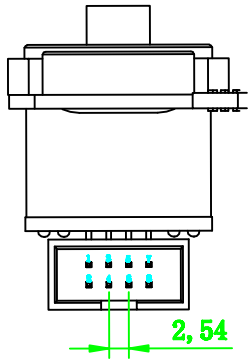

2.54筒牛针座

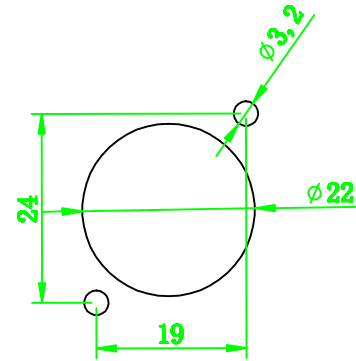

Frontplattenausschnitt
(Rueckseite)
Panel cut out (rear side)

TITLE: RCH-KNZ-63
N90自锁 带防尘盖防水
PART NO.:
WHKNZ63N9080001051AB33


SIZE
A4
SCALE
1:1
REV
A0

GENERAL TOLERANCES
UNLESS SPECIFIED
x±0.35
x°±3.0°
x±0.30
x°±2.0°
xx±0.25
xx°±1.5°
xxx±0.10
xxx°±1.0°

APPROVED BY:
Geoffrey.Song
CHECKED BY:
Elvis.Song
DESIGND BY:
Sunny.Xu

REMARK:

SHEET
1/1



VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM