







REACH & RoHS
COMPLIANT



NOTES

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30m Ω MAX.
4. INSULATION RESISTANCE: 1000M Ω MIN. AT 500V DC .
5. DIELECTRIC STRENGTH:1000V AC OR 1500V DC RMS AT 0.5mA
50Hz/60Hz FOR 1MINUTE.
6. The mark with ★ is the key inspection dimension for QC

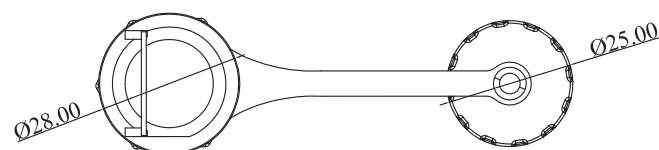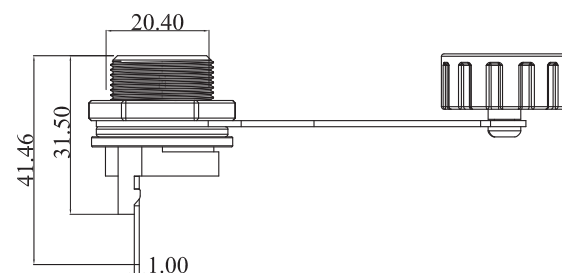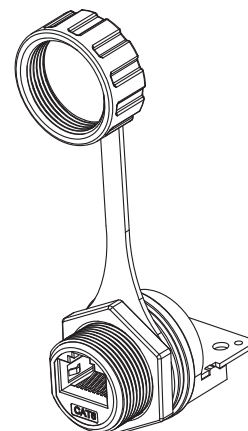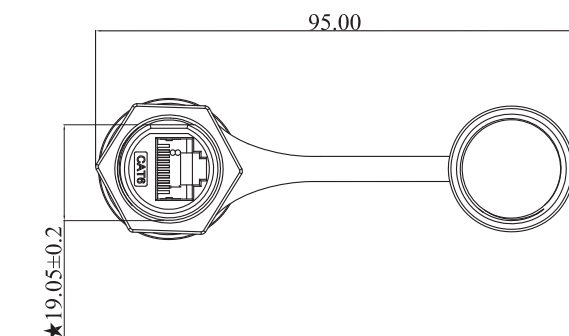

WIRE DIAGRAM

P1	P2
2 _____	2 _____
3 _____	3 _____
4 _____	4 _____
5 _____	5 _____
6 _____	6 _____
7 _____	7 _____
8 _____	8 _____
S _____	S _____

11	防水垫大	硅胶 黑色	PCS	1
10	防尘盖	PA66 黑色 防尘盖	PCS	1
9	硅胶片	硅胶 黑色	PCS	1
8	防水胶	黑色 防水胶	PCS	1
7	防水垫小	PE 防水垫	PCS	1
6	接地片	不锈钢 接地片	PCS	2
5	支架	8P8C 支架 磷铜 扁针镀金6u	PCS	1
4	PCB	PCB	PCS	1
3	硅胶圈	硅胶 黑色	PCS	1
2	螺母	PA66 黑色 94V-0	PCS	1
1	主体	CAT6 8P 全牙主体PA66 黑色 94V-0	PCS	1
NO.	TITLE	STANDARD	UNIT	QTY

VCOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE: CAT6 8P8C 母座
全牙 防水转接头 尾端空板

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHPMWR.J1101

SCALE
1:1

REV
A0

	$x \pm 0.35$
	$.x \pm 0.30$
	$.xx \pm 0.25$
	$.xxx \pm 0.10$

CHECKED BY:	Elvis.Song
DESIGNED BY:	Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1

