

A



WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1

$x \pm 0.35$
$.x \pm 0.30$
$.xx \pm 0.25$
$.xxx \pm 0.10$

DESIGNED BY:
Sunny.Xu

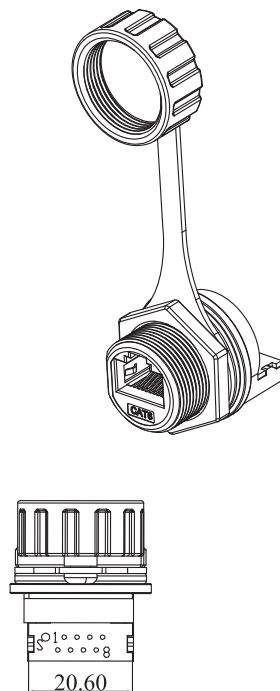

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC .
5. DIELECTRIC STRENGTH: 1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.
6. The mark with ★ is the key inspection dimension for QC

WIRE DIAGRAM

P1	P2
2 _____	2 _____
3 _____	3 _____
4 _____	4 _____
5 _____	5 _____
6 _____	6 _____
7 _____	7 _____
8 _____	8 _____
S _____	S _____

11	防水垫大	硅胶 黑色	pcs	1
10	防尘盖	PA66 黑色 防尘盖	pcs	1
9	硅胶片	硅胶 黑色	pcs	1
8	防水胶	黑色 防水胶	pcs	1
7	防水垫小	PE 防水垫	pcs	1
6	接地片	不锈钢 接地片	pcs	2
5	支架	8P8C 支架 磷铜 扁针镀金6u	pcs	1
4	PCB	PCB	pcs	1
3	硅胶圈	硅胶 黑色	pcs	1
2	螺母	PA66 黑色 94V-0	pcs	1
1	主体	CAT6 8P 全牙主体PA66 黑色 94V-0	pcs	1
NO.	TITLE	STANDARD	UNIT	QTY