
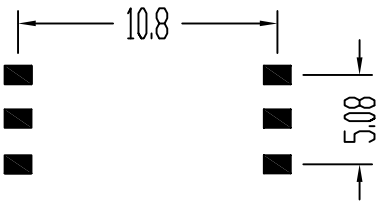
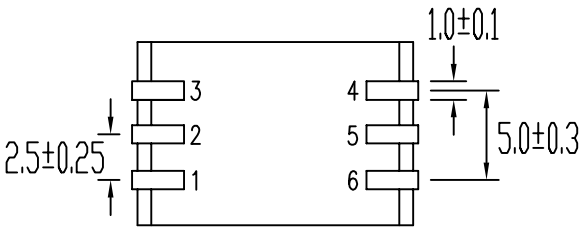




REACH & RoHS
COMPLIANT

1.Electric Characteristic& Dimensions(电气特性及尺寸) unit:mm



Suggested PAD Layout

- ELECTRICAL CHARATERISTICS:
- 1.DCR:PIN1-3=170 Ω MAX
PIN6-4=170 Ω MAX
 - 2.INDUCTANCE:200Hz,10mVrms
PIN1-3=2.4 H MIN
 - 3.IMPEDANCE:200Hz,10mVrms
PIN1-3=7KΩ MIN
 - 4.LEAKAGE INDUCTANCE:200Hz,10mVrms
PIN1-3=5.6mH typ(PIN6-4 Short)
 - 5.INSERTION LOSS:
2KHz,4.5dB MAX
 - 6.RETURN LOSS:
200Hz-4KHz=16dB MIN
 - 7.TURN RATIO:10KHzHz,0.1Vrms
PIN1-3:6-4=1±1%
 - 8.Frequency response:
200Hz-4KHz ±0.2dB
 - 9.T.H.D:600Hz -10dBm -93dB TYP
 - 10.HI-POT:
50Hz 3880VAC 3mA 60sec Pri-Sec
 - 11.ROHS COMPLIANT

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:
POTS TRANSFORMER

PART NO.:
WHTT6033

REMARK:


SIZE
A4

SCALE
1:1

SHEET
1/1

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35
.x±0.30
.xx±0.25
.xxx±0.10

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGNED BY:
Sunny.Xu