



REACH & RoHS
COMPLIANT

1. OUTLINE DIMENSION:(UNIT:mm)/外形尺寸（单位：mm）

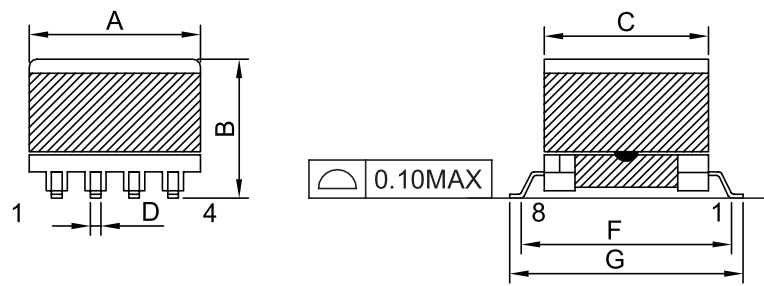

ELEVATION

SIDE VIEW

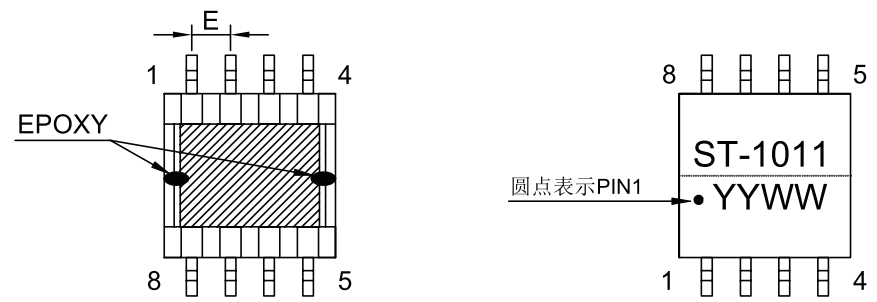

BOTTOM VIEW

标签内容

- NOTE:
- 1.N1绕组不交叉.
 - 2.所有绝缘胶带用高温胶带.
 - 3.磁芯单边开气隙(装于PIN1-4侧), 外包6mm胶带2Ts.
 - 4.底部磁芯接合处点黑胶固定并连接线包上.(如图)
 - 5.产品平贴度0.1mm MAX.
 - 6.产品真空含浸.
 - 7.产品顶部印标签,要求激光镭射.

A	B	C	D	E	F	G
13.0MAX	11.5MAX	12.0MAX	0.70±0.1	2.5±0.3	12.9±0.3	14.5±0.3

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:
变压器/TRANSFORMER

PART NO.:
ST1011WH

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/3

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°
.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

1	2	3	4	5	6	7	8																																																										
REACH & RoHS COMPLIANT																																																																	
2. CIRCUIT DIAGRAM/电气原理图				3. CONSTRUCTION DIAGRAM/内部结构图																																																													
PRI 1 N1,N3 2 AUX 3 N4 4 SEC 7,8 N2 5,6 ● START PIN5,6 & PIN7,8分别在PCB上短接在一起.				PIN1-4 PIN5-8 3Ts 2Ts 2Ts 2Ts N4 N3 N2 N1 CORE																																																													
4.WINDING INFORMATIONS TABLE/绕制明细表																																																																	
<table><tr><th rowspan="2">绕组 WINDING</th><th colspan="2">挡墙胶带 MARGIN TAPE</th><th rowspan="2">起始-收尾 S - F</th><th rowspan="2">线材 WIRE</th><th rowspan="2">圈数 TURNS</th><th rowspan="2">绝缘胶带 TAPE 6mm</th><th rowspan="2">备注 REMARK</th></tr><tr><th>PIN1-4 SIDE</th><th>PIN5-8 SIDE</th></tr><tr><td>N1</td><td>/</td><td>/</td><td>2--1</td><td>2UEW-H Ø0.22*2P</td><td>17Ts</td><td>2Ts</td><td>密绕+散绕/CLOSE+SPACE</td></tr><tr><td>N2</td><td>/</td><td>/</td><td>7, 8--5,6</td><td>2UEW-H Ø0.25*3P</td><td>12Ts</td><td>2Ts</td><td>密绕CLOSE</td></tr><tr><td>N3</td><td>/</td><td>/</td><td>2--1</td><td>2UEW-H Ø0.22*2P</td><td>17Ts</td><td>2Ts</td><td>密绕+散绕/CLOSE+SPACE</td></tr><tr><td>N4</td><td>/</td><td>/</td><td>4--3</td><td>2UEW-H Ø0.16</td><td>6Ts</td><td>3Ts</td><td>散绕/SPACE</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>		绕组 WINDING	挡墙胶带 MARGIN TAPE		起始-收尾 S - F	线材 WIRE	圈数 TURNS	绝缘胶带 TAPE 6mm	备注 REMARK	PIN1-4 SIDE	PIN5-8 SIDE	N1	/	/	2--1	2UEW-H Ø0.22*2P	17Ts	2Ts	密绕+散绕/CLOSE+SPACE	N2	/	/	7, 8--5,6	2UEW-H Ø0.25*3P	12Ts	2Ts	密绕CLOSE	N3	/	/	2--1	2UEW-H Ø0.22*2P	17Ts	2Ts	密绕+散绕/CLOSE+SPACE	N4	/	/	4--3	2UEW-H Ø0.16	6Ts	3Ts	散绕/SPACE																						
绕组 WINDING	挡墙胶带 MARGIN TAPE		起始-收尾 S - F	线材 WIRE						圈数 TURNS	绝缘胶带 TAPE 6mm	备注 REMARK																																																					
	PIN1-4 SIDE	PIN5-8 SIDE																																																															
N1	/	/	2--1	2UEW-H Ø0.22*2P	17Ts	2Ts	密绕+散绕/CLOSE+SPACE																																																										
N2	/	/	7, 8--5,6	2UEW-H Ø0.25*3P	12Ts	2Ts	密绕CLOSE																																																										
N3	/	/	2--1	2UEW-H Ø0.22*2P	17Ts	2Ts	密绕+散绕/CLOSE+SPACE																																																										
N4	/	/	4--3	2UEW-H Ø0.16	6Ts	3Ts	散绕/SPACE																																																										
				1.N1绕组不交叉. 2.所有绝缘胶带用高温胶带.																																																													
VOOHU 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd				TITLE: 变压器/TRANSFORMER		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song																																																							
				PART NO.: ST1011WH		SACLE 1:1	REV A0	x±0.35 x°±3.0° .x±0.30 .x°±2.0°	CHECKED BY: Elvis.Song																																																								
				REMARK:		SHEET 2/3		.xx±0.25 .xx°±1.5° .xxx±0.10 .xxx°±1.0°	DESIGND BY: Sunny.Xu																																																								
TEL: +86 400 1048 018		WEB: WWW.WOHU-TEK.COM																																																															

